

# Klaxon Mobility

the art of moving





Model	Klick Electric
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 5.8 Ah (weight 1.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 84 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	7.9 kg (battery excl.)
Range	About 25 km (speed setting 1, level ground)
Included accessories	Battery 5.8 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system

# KLICK Electric



**LIGHT**  
and easy to handle

**QUICK**  
and easy to attach




**ADAPTABLE**  
kickstand for easy handling

**COMPACT**  
and suitable for travel



**MASTER**  
and overcome everyday obstacles

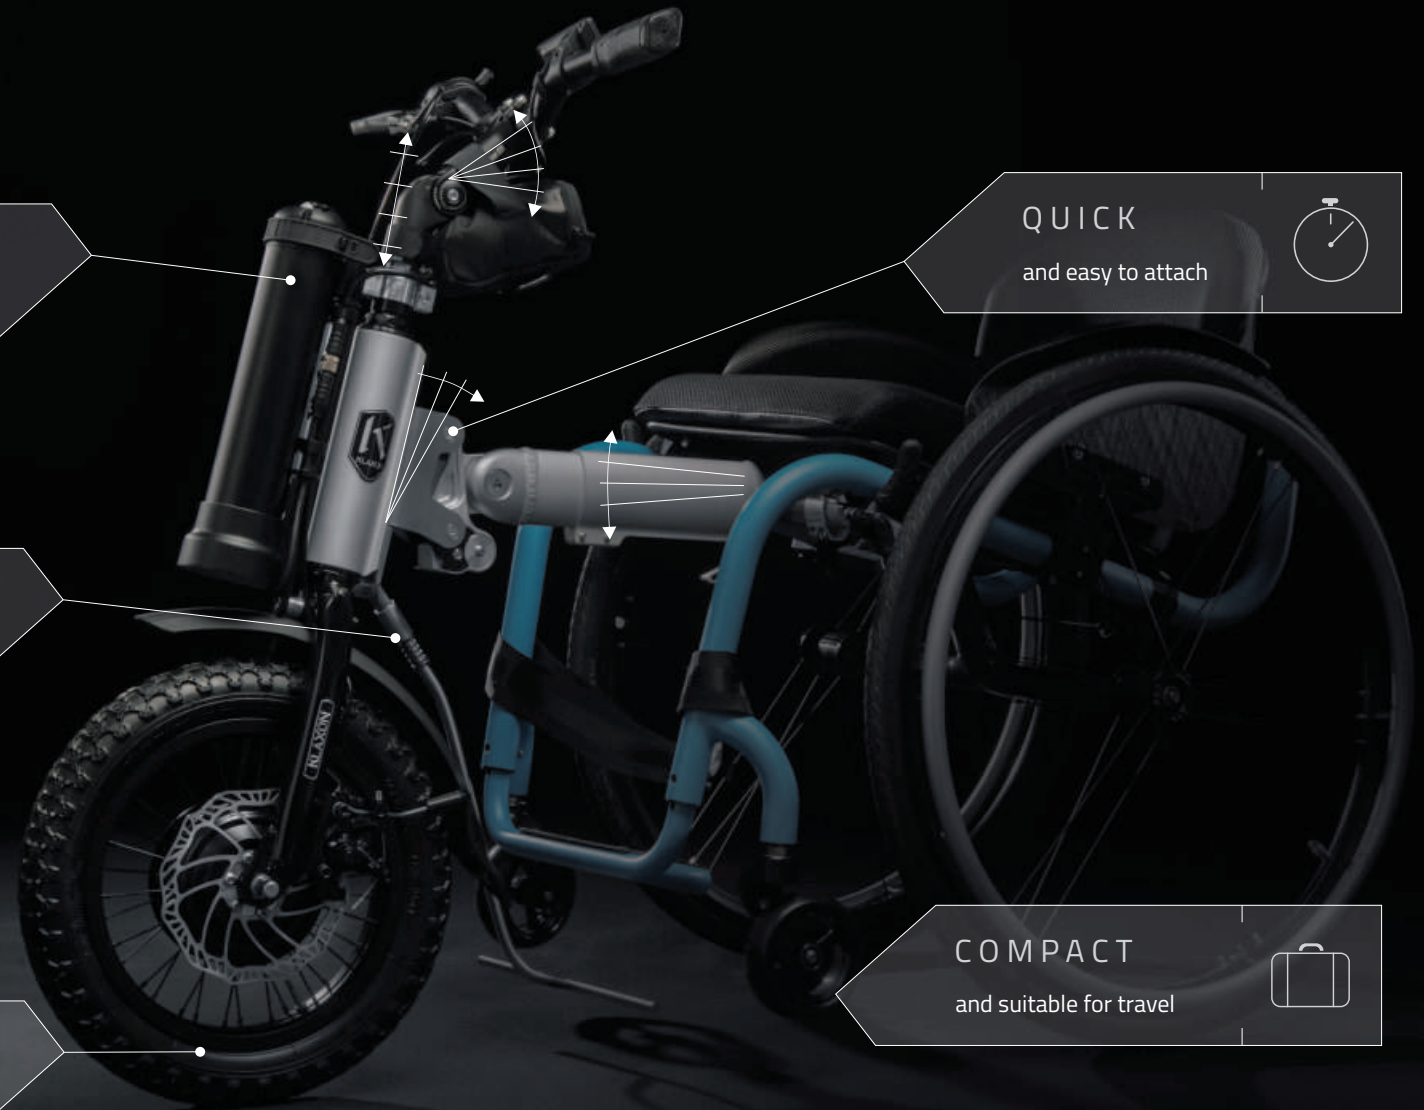



Model	Klick Electric Power
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 11 Ah (weight 3.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 84 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	7.9 kg (battery excl.)
Range	About 50 km (speed setting 1, ground level)
Included accessories	Battery 11 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system



# KLICK Electric

POWER



## LONG RANGE

suitable for long distance driving

## QUICK

and easy to attach



## ADAPTABLE

kickstand for easy handling



## CLIMB

steep roads and hills

## COMPACT

and suitable for travel





Model	Klick Electric Tetra
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 5.8 Ah (weight 1.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle, Comfort Drive System (accelerator and brake activated through push and pull movement)
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 95 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	8.9 kg (battery excl.)
Range	About 25 km (speed setting 1, ground level)
Included accessories	Comfort Drive System, Battery 5.8 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system

# KLICK Electric Tetra



**LIGHT**  
and easy to handle

**QUICK**  
and easy to attach




**ADAPTABLE**  
kickstand for easy handling

**COMPACT**  
and suitable for travel



**MASTER**  
and overcome everyday obstacles

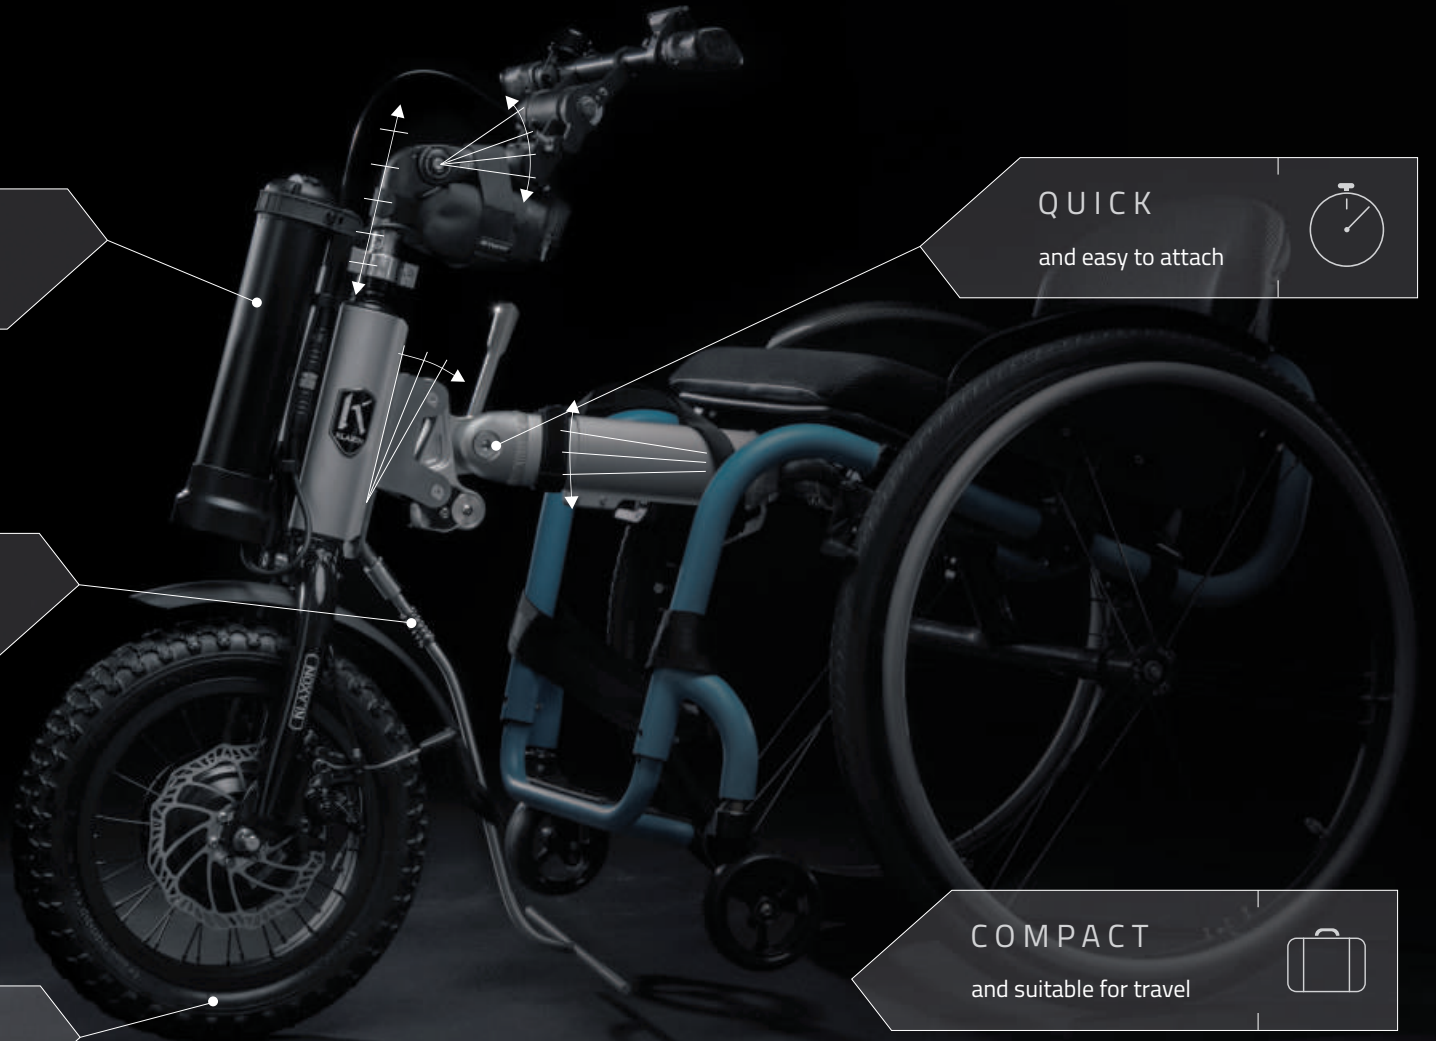




Model	Klick Electric Tetra Power
Material	Aluminium
Motor	36V x 370W Brushless
Wheel	14" smooth tyre tread
Display	Multifunction LCD, 5 speed settings
Battery	Lithium 36V x 11 Ah (weight 3.3 kg)
Handlebar	Aluminium, adjustable in height, depth and angle, Comfort Drive System (accelerator and brake activated through push and pull movement)
Brakes	Double Brake system 160 mm
Size	W 50 cm x H 95 cm x D 40 cm
Connection	Klick Linking System Klaxon® (worldwide patented)
Weight	8.9 kg (battery excl.)
Range	About 50 km (speed setting 1, level ground)
Included accessories	Comfort Drive System, Battery 11 Ah with battery charger, reverse gear, LCD display, bell, kickstand, splashguard, complete linking system








# KLICK Electric Tetra


POWER


 **CLIMB**  
steep roads and hills

**QUICK**  
and easy to attach 

 **LONG RANGE**  
suitable for long distance driving

**ADAPTABLE**  
kickstand for easy handling 

 **MASTER**  
and overcome everyday obstacles

**COMPACT**  
and suitable for travel 



# ACCESSORIES



1



2



3



4



5



8

6



7



1 Battery 11 Ah with battery charger  
Available fly-version 2.5 Ah with battery charger

2 Battery 5.8 Ah with battery charger  
Available fly-version 2.5 Ah with battery charger

3 Rear-view mirror, bell and front LED light

4 X-large wheelset for off-riding

5 14" Tyres, tyre tread or smooth tread tyre

6 Cellphone mounting

7 Klick Flybag

8 Additional weights

# TECHNICAL SPECIFICATIONS

	KLICK ELECTRIC	KLICK ELECTRIC POWER	KLICK ELECTRIC TETRA	KLICK ELECTRIC TETRA POWER	NOTE
<b>GENERAL DATA</b>					
Material	Aluminium	Aluminium	Aluminium	Aluminium	
Motor (Brushless) with reverse gear	250W	250W	250W	250W	
Drive system	Electric propulsion	Electric propulsion	Electric propulsion	Electric propulsion	
Display	Multifunction LCD	Multifunction LCD	Multifunction LCD	Multifunction LCD	
Brakes (Mechanical brakes)	Disk brakes 160 mm	Disk brakes 160 mm	Disk brakes 160 mm	Disk brakes 160 mm	
Field of use	Outdoor and indoor	Outdoor and indoor	Outdoor and indoor	Outdoor and indoor	
<b>PERFORMANCE</b>					
Maximum speed setting	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	3; 6; 10; 13; 16 km/h	
Range (Battery 11 Ah)	-	50 km	-	50 km	At moderate speed, level ground, weight load 75kg
Range (Battery 5,8 Ah)	25 km	-	25 km	-	At moderate speed, level ground, weight load 75kg
Maximum incline capability	10%	10%	10%	10%	Fully charged battery, weight load 75kg
Maximum obstacle climbing height	50 mm	50 mm	50 mm	50 mm	
Engine power	370 W	370 W	370 W	370 W	
Motor voltage	36 V	36 V	36 V	36 V	
Maximum weight capacity	120 Kg	120 Kg	120 Kg	120 Kg	Subject to limitation of wheelchair
<b>DIMENSIONS</b>					
Depth	56 cm	56 cm	56 cm	56 cm	
Width	63cm	63cm	63cm	63cm	
Height	72 cm	72 cm	72 cm	72 cm	
Weight	7,9 kg	7,9 kg	8,9 kg	8,9 kg	Excluding battery and linking system
Battery 11 Ah	-	3,3 kg	-	3,3 kg	
Battery 5,8 Ah	1,3 kg	-	1,3 kg	-	
Fly Battery 2,5 Ah	0,7 kg	0,7 kg	0,7 kg	0,7 kg	
<b>OPERATING CONDITIONS</b>					
Maximum operating altitude	2000 m	2000 m	2000 m	2000 m	
Air pressure	700 ÷ 1060 hPa	700 ÷ 1060 hPa	700 ÷ 1060 hPa	700 ÷ 1060 hPa	
Temperature	0 ÷ 40 °C	0 ÷ 40 °C	0 ÷ 40 °C	0 ÷ 40 °C	
Relative humidity	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	
<b>TRANSPORT/STORAGE CONDITIONS</b>					
Temperature	10 ÷ 50 °C	10 ÷ 50 °C	10 ÷ 50 °C	10 ÷ 50 °C	
Relative humidity	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	30 ÷ 90 %	
<b>BATTERY CHARGER</b>					
Operating voltage	220 V	220 V	220 V	220 V	
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	
Output voltage	32 V	32 V	32 V	32 V	
<b>BATTERY DATA</b>					
	BATTERY 5,8 Ah	BATTERY 11 Ah	BATTERY 5,8 Ah	BATTERY 11 Ah	Note: Fly Battery 2,5 Ah; time to recharge 2 h
Battery voltage	36 V	36 V	36 V	36 V	
Capacity	5,8 Ah	11 Ah	5,8 Ah	11 Ah	Depending on battery status
Charging time	2,5 h	4h	2,5 h	4h	
<b>SUITABILITY CRITERIA FOR WHEELCHAIRS</b>					
Minimum front frame width (Inside tubes)	230 mm	230 mm	230 mm	230 mm	Measured from inside front frame tube to inside front frame tube
Maximum front frame width (Inside tubes)	530 mm	530 mm	530 mm	530 mm	Measured from inside front frame tube to inside front frame tube
Wheelchair tubing styles	Round-shaped or oval-shaped	Round-shaped or oval-shaped	Round-shaped or oval-shaped	Round-shaped or oval-shaped	
Wheelchair types	Rigid frame or folding frame	Rigid frame or folding frame	Rigid frame or folding frame	Rigid frame or folding frame	
<b>PRODUCT CLASSIFICATION</b>					
According to the EU Medical Device Directive	Classification of risk Class I	Classification of risk Class I	Classification of risk Class I	Classification of risk Class I	
Adequate protection against electric shock	Class II	Class II	Class II	Class II	
Classification of safety	Type B	Type B	Type B	Type B	




## LINKING SYSTEM KLAXON®


The innovative linking system connects to any hand bike of the KLICK product range in seconds, allowing you to switch between your favourite KLICK hand bikes with ease. The universal connection hub adapts to all manual wheelchair types, including foldable wheelchairs.

Experience a new level of freedom without compromising the manoeuvrability and comfort of your manual wheelchair. LINE-UP. ENGAGE. KLICK.


**QUICK**  
and easy to attach



**LINKS**  
in seconds



**UNIVERSAL**  
connection hub



Find more Infos  
on our website:



Contact

**KLAXON MOBILITY GmbH**  
High Tech Campus Villach  
Europastrasse 12, 9524 Villach, Austria  
+43 664 4681294  
info@klaxon-klick.com  
www.klaxon-klick.com